


1. No restrictions on materials or texture provided the overhead door has an applied panel or applied trim. Wood, wood overlay or full composite overlay overhead garage doors are preferred.
 2. The overhead garage door design should be of an appropriate style for the design of the garage (example: farmhouse or craftsman style architectural details on the garage).
- E. All overhead garage doors with windows shall have true or simulated divided lites or no divisions.
- F. New garages, sheds and outbuildings are subject to Section 20. New Construction and Zoning Ordinance Section 9.8-H.

15. GUTTERS


Deteriorated gutters and downspouts can cause extensive damage to building materials and detailing. Existing gutters should be regularly cleaned and maintained. If new gutters are required, half-round designs are the most historically accurate.

- A. of boxed or built-in type should be repaired rather than replaced if possible.
- B. of hang-on type should be half-round rather than "K" or ogee.
- C. should have downspouts located away from significant architectural features on the front of the building.
- D. should provide proper drainage through use of downspouts and splash blocks to avoid water damage to the building.


GUTTERS: Illustrations

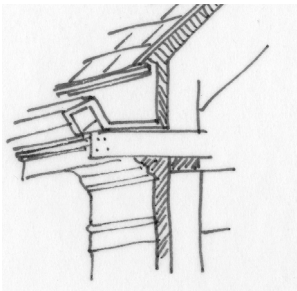


Built-in gutter (preserve if possible)

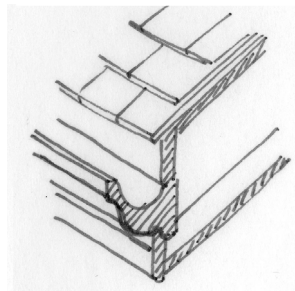

Built-in gutter (preserve if possible)

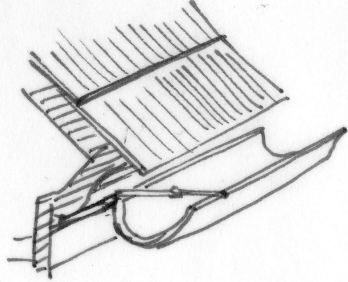

Half-round gutter preferred

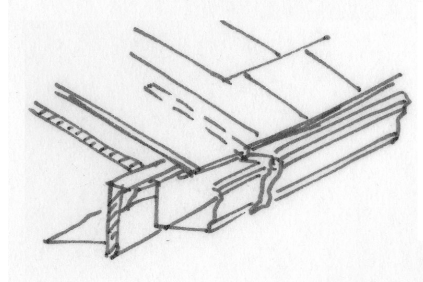

Ogee ("K") gutter- not preferred